


VIBRATION MOTOR

振动马达

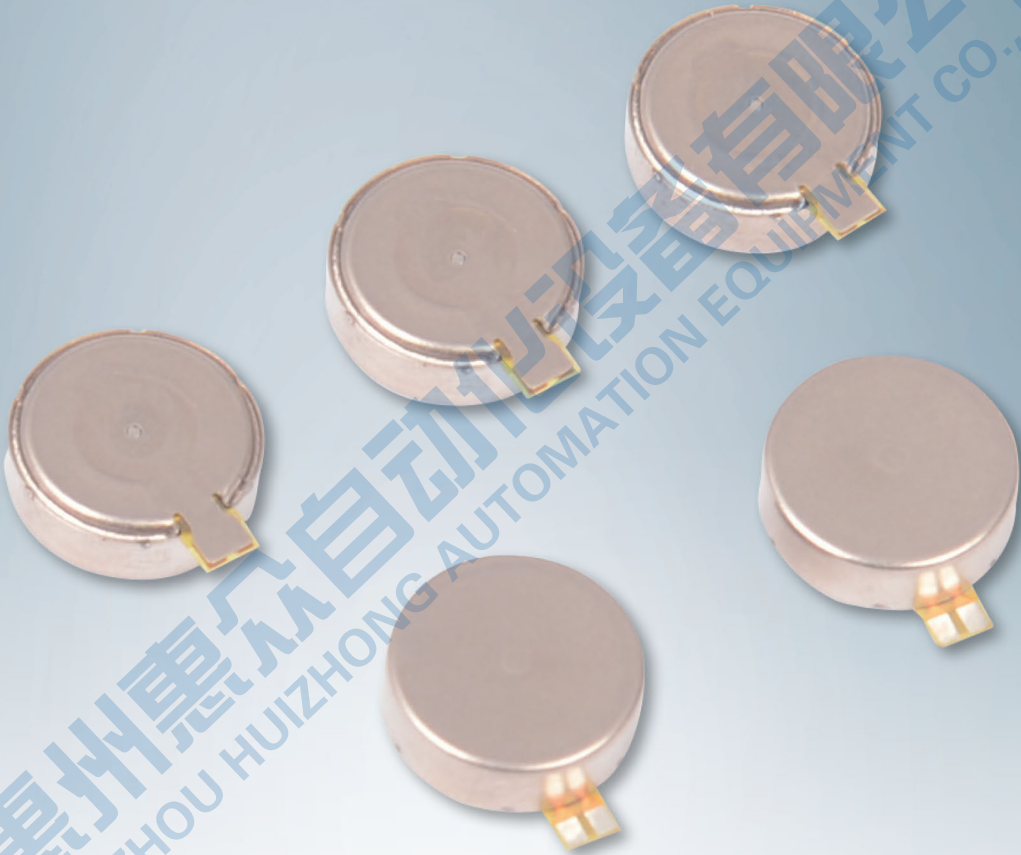


Vibration Motor 振动马达系列

HVC0827A1576F



Model No. 产品型号	HVC08271576F
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	100Max
Rated Speed(rpm) 额定转速	9000
Starting Voltage(V) 起动电压	2.3Max
Terminal Resistance(mm) 端子阻抗	28 ± 15%/54 ± 15%
Insulation Resistance(MΩ) 绝缘电阻	≥10
Lead Spec 导线规格	AWG32 UL 1571

HVC0834A1019F

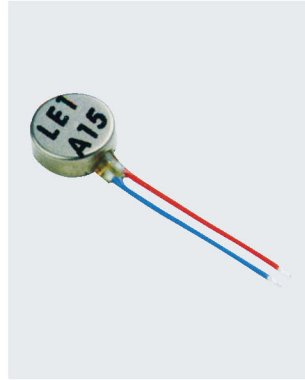


Model No. 产品型号	HVC08341019F
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	100Max
Rated Speed(rpm) 额定转速	9000
Starting Voltage(V) 起动电压	2.3Max
Terminal Resistance(mm) 端子阻抗	28 ± 15%/54 ± 15%
Insulation Resistance(MΩ) 绝缘电阻	≥10
Lead Spec 导线规格	AWG32 UL 1571

HVC1021A023F




Model No. 产品型号	HVC1027A023F
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	90Max
Rated Speed(rpm) 额定转速	9000
Starting Voltage(V) 起动电压	2.3Max
Terminal Resistance(mm) 端子阻抗	30 ± 15%/60 ± 15%
Insulation Resistance(MΩ) 绝缘电阻	≥10
Lead Spec 导线规格	AWG32 UL 1571

HVC1030A042F

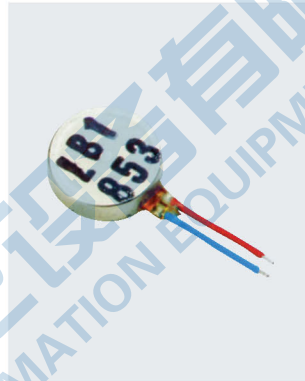

Model No. 产品型号	HVC1030A042F
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	90Max
Rated Speed(rpm) 额定转速	9000
Starting Voltage(V) 起动电压	2.3Max
Terminal Resistance(mm) 端子阻抗	30 ± 15%/60 ± 15%
Insulation Resistance(MΩ) 绝缘电阻	≥10
Lead Spec 导线规格	AWG32 UL 1571

HVC1034A016F

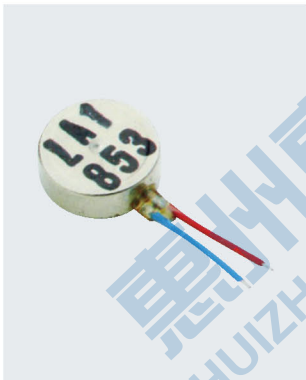

Model No. 产品型号	HVC1034A016F
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	90Max
Rated Speed(rpm) 额定转速	9000
Starting Voltage(V) 起动电压	2.3Max
Terminal Resistance(mm) 端子阻抗	30 ± 15%/60 ± 15%
Insulation Resistance(MΩ) 绝缘电阻	≥10
Lead Spec 导线规格	AWG32 UL 1571

HVC1030A101F



Model No. 产品型号	HVC1030A101F
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	90Max
Rated Speed(rpm) 额定转速	9000
Starting Voltage(V) 起动电压	2.3Max
Terminal Resistance(mm) 端子阻抗	30 ± 15%/60 ± 15%
Insulation Resistance(MΩ) 绝缘电阻	≥10
Lead Spec 导线规格	AWG32 UL 1571

HVC1030A200F



Model No. 产品型号	HVC1030A200F
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	90Max
Rated Speed(rpm) 额定转速	9000
Starting Voltage(V) 起动电压	2.3Max
Terminal Resistance(mm) 端子阻抗	30 ± 15%/60 ± 15%
Insulation Resistance(MΩ) 绝缘电阻	≥10
Lead Spec 导线规格	AWG32 UL 1571

HVC1036A



Model No. 产品型号	HVC1036
Rated Voltage(V) 额定电压	2AC
Rated Current(mA) 额定电流	90Max
Input Frequency(Hz) 输入频率	175 ± 0.1
Insulation Resistance(Ω) 端子阻抗	26 ± 20%
Lead Spec 导线规格	AWG32 UL 1571

HVZ4NC1A1591901



Model No. 产品型号	HVZ4NC1A1591901
Starting Voltage(V) 启动电压	1.1
Rated Voltage(V) 额定电压	1.3
Rated Current(mA) 额定电流	125Max
Starting Current(mA) 堵转电流	145Max
Rated Speed(rpm) 额定转速	10000 ± 2500

HVZ30C1T8219651



Model No. 产品型号	HVZ30C1T8219651
Starting Voltage(V) 启动电压	2.3
Rated Voltage(V) 额定电压	2.7Max
Rated Current(mA) 额定电流	75 ± 10Max
Starting Current(mA) 堵转电流	95Max
Rated Speed(rpm) 额定转速	14000 ± 2500

HVZ4PC3B8129521




Model No. 产品型号	HVZ4PC3B8129521
Starting Voltage(V) 启动电压	2.6
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	100Max
Starting Current(mA) 堵转电流	120Max
Rated Speed(rpm) 额定转速	11000 ± 2500

HVZ4MFB81796121



Model No. 产品型号	HVZ4MFB81796121
Starting Voltage(V) 启动电压	2.6
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	100Max
Starting Current(mA) 堵转电流	120Max
Rated Speed(rpm) 额定转速	11000 ± 2500

HVZ4FC1B1301781

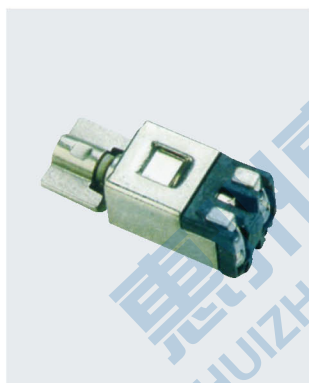

Model No. 产品型号	HVZ4FC1B1301781
Starting Voltage(V) 启动电压	2.6
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	110Max
Starting Current(mA) 堵转电流	130Max
Rated Speed(rpm) 额定转速	10000 ± 2500

HVZ4FH2B8159571



Model No. 产品型号	HVZ4FH2B8159571
Starting Voltage(V) 启动电压	2.6
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	125Max
Starting Current(mA) 堵转电流	135Max
Rated Speed(rpm) 额定转速	14000 ± 2500

HVZ4TH1B0301954



Model No. 产品型号	HVZ4TH1B0301954
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	85Max
Rated Speed(rpm) 额定转速	10500 ± 2500
Starting Current(mA) 堵转电流	105Max
Terminal Resistance(Ω) 端子阻抗	35 ± 20%
Starting Voltage(V) 启动电压	2Max
Shaft End Play(mm) 轴向间隙	0.05~0.2

HVZ4TH3B0791623



Model No. 产品型号	HVZ4TH3B0791623
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	90Max
Rated Speed(rpm) 额定转速	10000 ± 2500
Starting Current(mA) 堵转电流	110Max
Terminal Resistance(Ω) 端子阻抗	35 ± 20%
Starting Voltage(V) 启动电压	2Max
Shaft End Play(mm) 轴向间隙	0.05~0.2

Vibration Motor 振动马达系列

HVZ4TH5B1241993




Model No. 产品型号	HVZ4TH5B1241993
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	70Max
Rated Speed(rpm) 额定转速	14500 ± 2500
Starting Current(mA) 堵转电流	95Max
Terminal Resistance(Ω) 端子阻抗	40 ± 20%
Starting Voltage(V) 起动电压	2Max
Shaft End Play(mm) 轴向间隙	0.05~0.2

HVZ4KC1B1051202




Model No. 产品型号	HVZ4KC1B1051202
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	70Max
Rated Speed(rpm) 额定转速	14000 ± 2500
Starting Current(mA) 堵转电流	100Max
Terminal Resistance(Ω) 端子阻抗	36 ± 20%
Starting Voltage(V) 起动电压	1.7Max
Shaft End Play(mm) 轴向间隙	0.05~0.2

HVZ4TL2B1241675

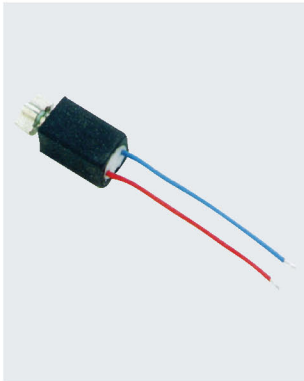


Model No. 产品型号	HVZ4TL2B1241675
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	80Max
Rated Speed(rpm) 额定转速	15000 ± 2500
Starting Current(mA) 堵转电流	105Max
Terminal Resistance(Ω) 端子阻抗	35 ± 20%
Starting Voltage(V) 起动电压	2Max
Shaft End Play(mm) 轴向间隙	0.05~0.2
Lead Spec 导线规格	AWG32 UL1571

HVZ4TJ1B0020011

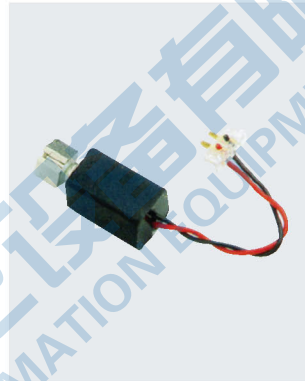

Model No. 产品型号	HVZ4TJ1B0020011
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	80Max
Rated Speed(rpm) 额定转速	11000 ± 2500
Starting Current(mA) 堵转电流	105Max
Terminal Resistance(Ω) 端子阻抗	35 ± 20%
Starting Voltage(V) 起动电压	2Max
Shaft End Play(mm) 轴向间隙	0.05~0.2
Lead Spec 导线规格	AWG32 UL1571

HVZ4SL2B0250131

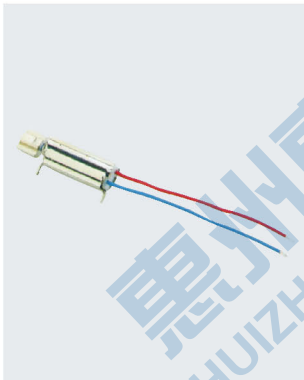

Model No. 产品型号	HVZ4SL2B0250131
Rated Voltage(V) 额定电压	3
Rated Current(mA) 额定电流	65Max
Rated Speed(rpm) 额定转速	14500 ± 2500
Starting Current(mA) 堵转电流	90Max
Terminal Resistance(Ω) 端子阻抗	41 ± 20%
Starting Voltage(V) 起动电压	1.7Max
Shaft End Play(mm) 轴向间隙	0.05~0.2
Lead Spec 导线规格	AWG32 UL1571

HVZ7AL2A009000A



Model No. 产品型号	HVZ7AL2A009000A
Rated Voltage(V) 额定电压	1.3
Rated Current(mA) 额定电流	65Max
Rated Speed(rpm) 额定转速	6000 ± 2000
Starting Current(mA) 堵转电流	170Max
Terminal Resistance(Ω) 端子阻抗	9.5 ± 20%
Starting Voltage(V) 起动电压	0.75Max
Shaft End Play(mm) 轴向间隙	0.1~0.3
Lead Spec 导线规格	AWG32 UL1571

HVQ7AL260002



Model No. 产品型号	HVQ7AL260002
Rated Voltage(V) 空载电压	1.3~3
Non Load Curret(mA) 空载电流	15~170
Non Load Speed(rpm) 空载转速	10000~40000
Terminal Resistance(Ω) 端子阻抗	1.0~30
Starting Voltage(V) 导线规格	AWG32 UL1571
Shaft End Play(mm) A向压力	20Max

HVZ6SH1A0060711



Model No. 产品型号	HVZ6SH1A0060711
Rated Voltage(V) 额定电压	1.3
Rated Current(mA) 额定电流	90Max
Rated Speed(rpm) 额定转速	8500 ± 2000
Starting Current(mA) 堵转电流	145Max
Terminal Resistance(Ω) 端子阻抗	11 ± 20%
Starting Voltage(V) 起动电压	0.75Max
Shaft End Play(mm) 轴向间隙	0.1~0.3